








# H220E

## Technical data




 Max Lifting Capacity	 Motor Power	 Travel Speed	 Hydraulic Flow	 Max Lifting Height
<b>1200</b> kg	<b>30×2</b> kw	<b>25</b> km/h	<b>60</b> l/min	<b>2.6</b> m



Technical data	H220E
Battery Type	Lithium iron phosphate battery
Battery capacity/kWh	32.2
Drive motor/kW	30
Pump motor/kW	28
Charging voltage/V	110/220(380)
Fast charging time/h	2
Loading time/h	9.5-13.5
Running time (uninterrupted)	8.5-9.5
Operating voltage V	12
Battery Ah	45
Operating weight kg	2600
Tipping load ,max kg	1500
Lifting capacity,max kg	1200
Operator's cab	Cab/Canopy
Travel speed km/h	0~20
Steering angle °	45
Turn radius inside/outside mm	1410/3025
Standard tires	10.0/75-15.3
Hydraulic oil tank capacity l	50
Working hydraulic flow l/min	60
Working hydraulic pressure bar	200
Transmission type	Electric direct drive

# H220E Dimensions/mm

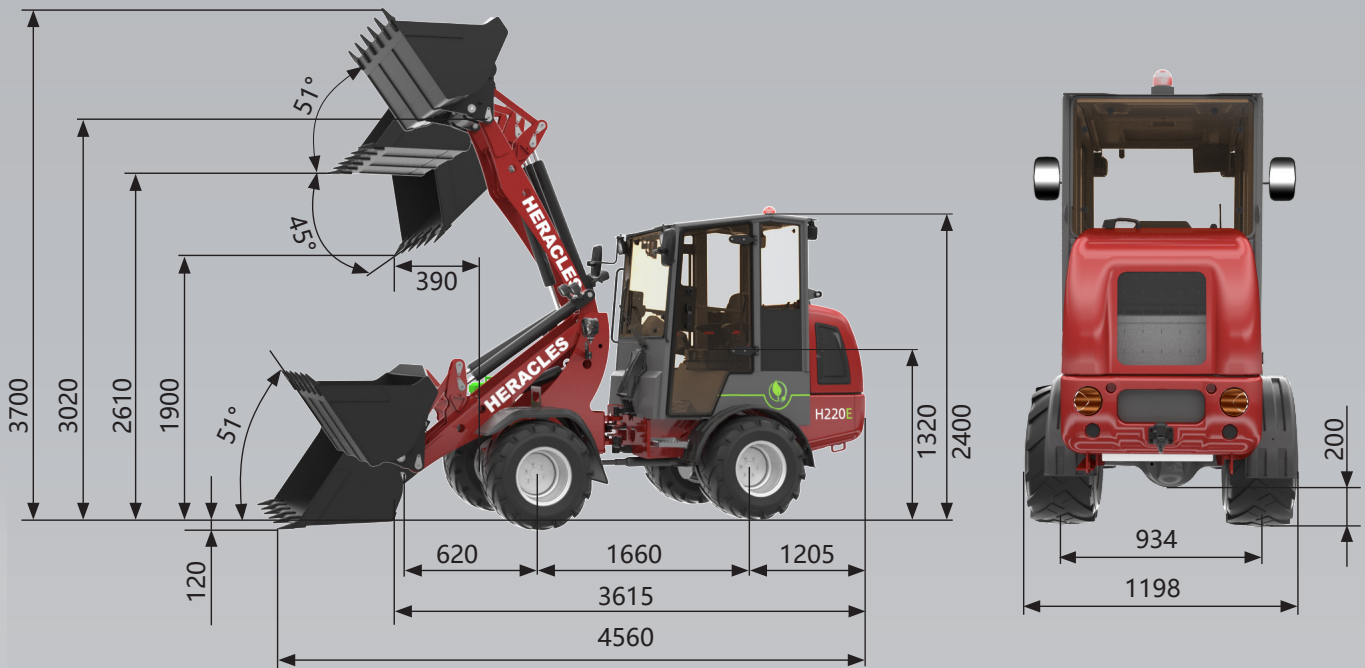

Tires size	Height	Width
10.0/75-15.3	2395	1198
31/15.5-15	2400	1450

<p>S 2200 kg</p> <p>T 1620 kg</p> <p>U 1200 kg</p> <p>V 900 kg</p> <p>W 2650 kg</p> <p>X 1700 kg</p> <p>Y 1250 kg</p>		
---	--	--

Products will continue to be optimized, so the technical data on this page may not be updated in real time.  
 For more information at: [www.heracles.eu](http://www.heracles.eu)  
 Or contact us (contact information is on the back cover).